

362S162-43-P (33 ksi, CP60, Punched)

Structural stud | 3.625 in nominal web | 43 mil (18 ga)

Dimensions & Material Properties

Nominal web depth	3.625 in
Actual web depth	3.625 in
Flange width	1.625 in
Design thickness	0.0451 in
Minimum steel thickness	0.0428 in
Yield strength, Fy	33 ksi
Coating designation	CP60
Return lip	0.63 in
Service opening	1.5 x 4 in
Service hole spacing	24 in on center



Product Supply

Manufactured in Houston, Texas. Supplied to specified cut lengths and quantities in counted, strapped bundles.

Project Requirements

Match the full profile designation, material grade and coating to the approved project drawings. Member selection, bracing, connections and structural design follow the project engineer's details.

SECTION SCHEMATIC

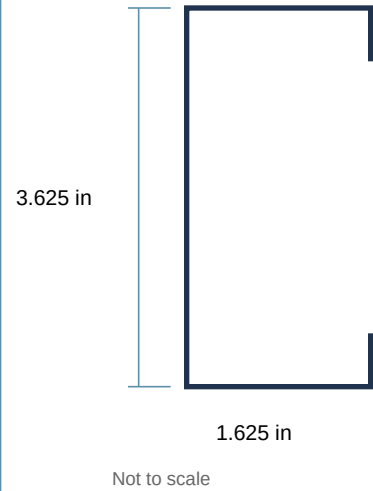

1.5 x 4 in opening

Installed factory punching. 24 in on-center spacing. First hole center: 12 or 24 in from the end, as specified for the order.

BELTWAY STEEL
11903 N Garden St
Houston, TX 77071

(346) 200-4007
beltwaysteel.com