

## 600S162-43-P (33 ksi, CP60, Punched)

Structural stud | 6 in nominal web | 43 mil (18 ga)

### Dimensions & Material Properties

|                         |                 |
|-------------------------|-----------------|
| Nominal web depth       | 6 in            |
| Actual web depth        | 6 in            |
| Flange width            | 1.625 in        |
| Design thickness        | 0.0451 in       |
| Minimum steel thickness | 0.0428 in       |
| Yield strength, Fy      | 33 ksi          |
| Coating designation     | CP60            |
| Return lip              | 0.63 in         |
| Service opening         | 1.5 x 4 in      |
| Service hole spacing    | 24 in on center |



### Product Supply

Manufactured in Houston, Texas. Supplied to specified cut lengths and quantities in counted, strapped bundles.

### Project Requirements

Match the full profile designation, material grade and coating to the approved project drawings. Member selection, bracing, connections and structural design follow the project engineer's details.

#### SECTION SCHEMATIC

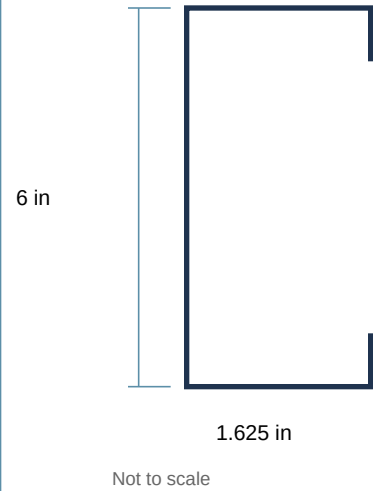

1.5 x 4 in opening

Installed factory punching. 24 in on-center spacing. First hole center: 12 or 24 in from the end, as specified for the order.

BELTWAY STEEL  
11903 N Garden St  
Houston, TX 77071

(346) 200-4007  
beltwaysteel.com